

BOGEN

ACCESSORY EQUIPMENT INSTRUCTION SHEET

MODEL MMS-1 MONITOR SPEAKER PANEL

DESCRIPTION

The MMS-1 is an optional panel for use with the DWA-60, MTX30B, MX30A and MX60A amplifiers. It consists of an output level meter, a speaker and a volume control. The MMS-1 enables the operator to monitor the sound output level both by eye and ear. The shipping weight of the accessory is 2 pounds.

INSTALLATION

To install the MMS-1 on the amplifier, use the following procedure:


1. Remove the four thumb screws from sides of cage. Remove four No. 6 screws holding cage on bottom and remove cage. Remove the No. 6 sheet metal screw on bottom front right hand side, next to rubber foot.
2. Remove two No. 6 pal nuts holding speaker

panel in place (on inside top). Remove speaker panel.

3. Put MMS-1 panel in place on front panel, replace the two No. 6 pal nuts (removed in Step 2) and tighten on to the bolts. Put 5-pin plug into MMS-1 ACCESSORY socket, securely.
4. Replace and tighten the No. 6 sheet metal screw on bottom front (near rubber foot).
5. Replace cage and fasten with the four No. 6 sheet metal screws. Replace leather straps and four thumb screws.

OPERATION

Control amplifier output volume as explained in amplifier instruction manual. For average output level, MMS-1 meter should read at point where needle starts to swing into red portion. This is a reference level only. To control volume of monitor speaker use MONITOR SPEAKER VOLUME CONTROL.

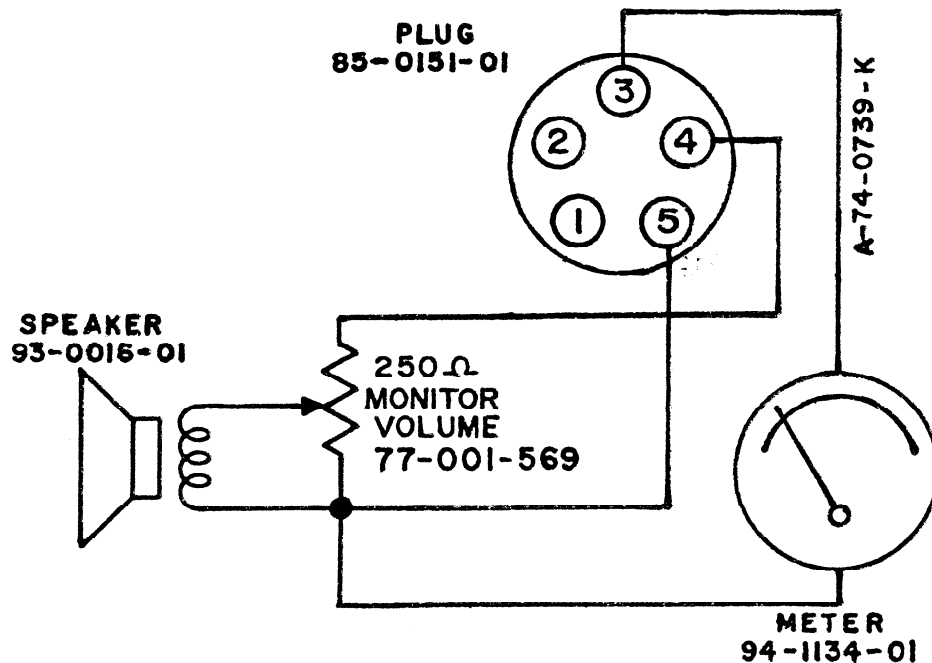

Model MMS-1 Monitor Speaker Panel, Schematic Diagram

LEAR SIEGLER, INC.



BOGEN DIVISION
P.O. BOX 500
PARAMUS, N. J. 07652